


The information provided herein is from CONNPLY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights contained herein, including but not limited to, trademarks, patents, copyrights, trade secrets, and technical know-how, are owned exclusively by CONNPLY or its affiliates. Unauthorized use or modification is strictly prohibited without prior consent from CONNPLY. All intellectual properties provided herein are for reference purposes only and does not constitute authorization of its use in any format or manner. CONNPLY may enforce its intellectual property rights at its own discretion, failures or delays to exercise such rights does not constitute a waiver of such rights.

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LJC 01/16/09'		LJC 01/16/09'
J	DRAWING UPDATE	JLZ 12/27/19'		

TOLERANCE:

Abbr.	TOLERANCE						
	P=0.50	P=0.80	P=1.00	P=1.25	P=1.50	P=2.00	P=2.54
P	±0.050	±0.080	±0.080	±0.100	±0.125	±0.150	±0.250
Pt	±0.050	±0.080	±0.080	±0.100	±0.125	±0.150	±0.250
W	±0.050	±0.080	±0.080	±0.100	±0.125	±0.150	±0.250
M	±0.050	±0.080	±0.080	±0.100	±0.125	±0.150	±0.250
Cw	±0.020	±0.030	±0.030	±0.030	±0.030	±0.040	±0.040
L	(15-100)±3 (101-300)±5 (301-600)±10 (601-1000)±15						





NOTES:

- Insulation material: PVC
Supporting Tape material: Polyester
Conductor material: Tin plated copper
Temperature: -20°C~+80°C.


2. Product Number Code

DS1057-03 - X X X X X X X X X X

- Cable Style
A: A type
B: B type
- Cable Thickness
1: 0.12mm
4: 0.136mm(For Ph 1.25mm)
- Total Length(Dim L)
A: 110mm B: 150mm
C: 120mm D: 160mm
E: 100mm F: 200mm
G: 250mm
or XXX:XXXmm
- Supporting tape Length
4: 4.0mm 5: 5.0mm
6: 6.0mm 8: 8.0mm
10: 10.0mm
- Supporting Tape color
L: Blue
- Strip Length
2: 2.0mm 3: 3.0mm
4: 4.0mm 5: 5.0mm
6: 6.0mm
- Insulation color
W: White
- No.Of positions
02: 2pin
60: 60pin
- Conductor Size
H: 0.035x0.65mm(Ph 1.0mm)
J: 0.035x0.3mm(Ph 0.5mm)
K: 0.05x0.8mm(Ph 1.25mm)
- Pitch
1: 1.00 5: 0.50
2: 2.00 6: 1.25
3: 1.50 8: 0.80
4: 2.54

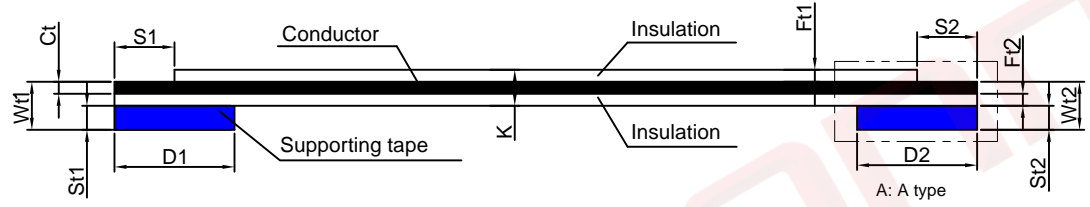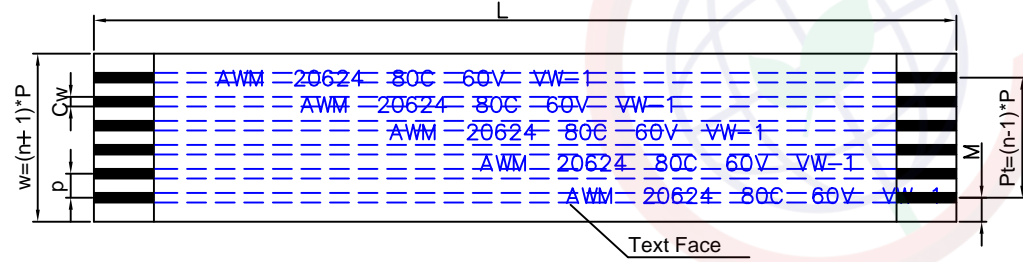

Pitch	No.Of positions	Conductor Size Ct*Cw (mm)	Strip Length S1=S2 (mm)	Supporting tape Length D1=D2 (mm)
p=0.50	06-60pin	0.035x0.3	3-4	5-8
p=0.80	06-40pin	0.05x0.5	4-5	8-10
p=1.00	03-50pin	0.035x0.65	4-5	8-10
p=1.25	03-36pin	0.05x0.8	4-6	10
p=1.50	02-30pin	0.10x0.5	4-6	10
p=2.00	02-30pin	0.10x0.5	3-6	5-10
p=2.54	02-18pin	0.10x0.7	4-6	10
		0.10x1.27		




Ft1±0.005	0.043
Ft2±0.005	0.043

GENERAL TOLERANCE		ANGLE TOLERANCE	
X.	±0.60	X.	±5°
.X	±0.38	.X	±3°
.XX	±0.25	.XX	±2°

DRAWING TYPE	CUSTOMER
SCALE	1:1 SHEET 1 OF 1
DRAWING NO.	C-DS1057-03-XXXXX-J

PROJECTION		TITLE	UL 20624 FLEXIBLEFLAT CABIE
UNITS	mm	SERIES	DS1057-03 SERIES
SHEET SIZE	A4		



(Series Image-Reference Only)