


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	JLZ 11/18/15'	~	

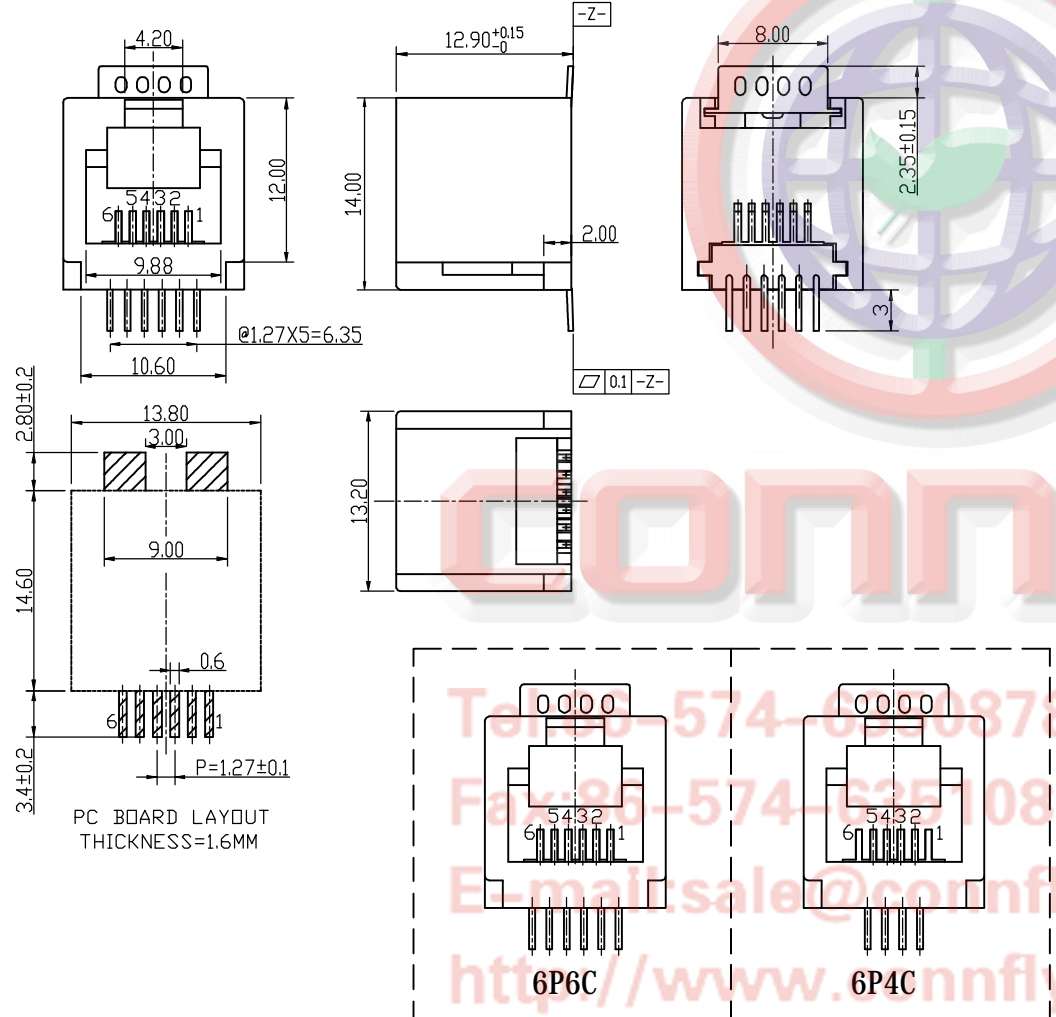

- NOTES:
- ELECTRICAL CHARACTERISTICS:
 - CONTACT RESISTANCE: 20mΩ Max.
 - DIELECTRIC WITHSTANDING VOLTAGE: 600V AC(rms) FOR 1 MINUTE.
 - INSULATION RESISTANCE: 1000MΩ Min.
 - CURRENT RATING: 1.5A.
 - ENVIRONMENT CHARACTERISTICS:
 - TEMPERATURE: -40°C~+85°C.
 - MATERIALS
 - CONTACT MATERIAL: COPPER ALLOY.
 - CONTACT PLATING: SELECTIVE GOLD.
 - INSULATOR MATERIALS: LCP, BLACK, UL94-V0.
 - PRODUCT NUMBER CODE:

DS1132-05-X X X X X

- Mylar Support
 - S: W/ Mylar
 - X: W/O Mylar
- Housing Color
 - B: Black
- Contact Plating
 - 0: Selective Gold Flash
 - 3: Selective 3u" Gold
 - 15: Selective 15u" Gold
 - 30: Selective 30u" Gold
- No. Of Contacts
 - 4: 6P4C
 - 6: 6P6C
- Connector Type
 - S: Socket

Tel: 86-574-6298787
 Fax: 86-574-62510817
 E-mail: sales@connfly.com
<http://www.connfly.com>

Add: East Industry Zone Kuang Yan
 Town Cixi Ningbo City
 P.C: 315333

GENERAL TOLERANCE	ANGLE TOLERANCE	PROJECTION	TITLE
X. ±0.60	X. ±5°	UNITS mm	RJ11 PCB Jack 6 Positions W/O Shell SMT TYPE
.X ±0.38	.X ±3°	SHEET SIZE A4	SERIES DS1132-05 SERIES
.XX ±0.25	.XX ±2°	DRAWING TYPE CUSTOMER	
SCALE 1:1		SHEET 1 OF 1	
DRAWING NO. C-DS1132-05-XXXXX-A		晨翔电子有限公司 CONNFLY CONNFLY ELECTRONIC CO. LTD	