


The information provided herein is from CONNELY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights contained herein, including but not limited to, trademarks, patents, copyrights, trade secrets, and technical know-how, are owned exclusively by CONNELY or its affiliates. Unauthorized use of this information in any format or manner. CONNELY may enforce its intellectual property rights at its own discretion; failures or delays to exercise such rights does not constitute a waiver of such rights.

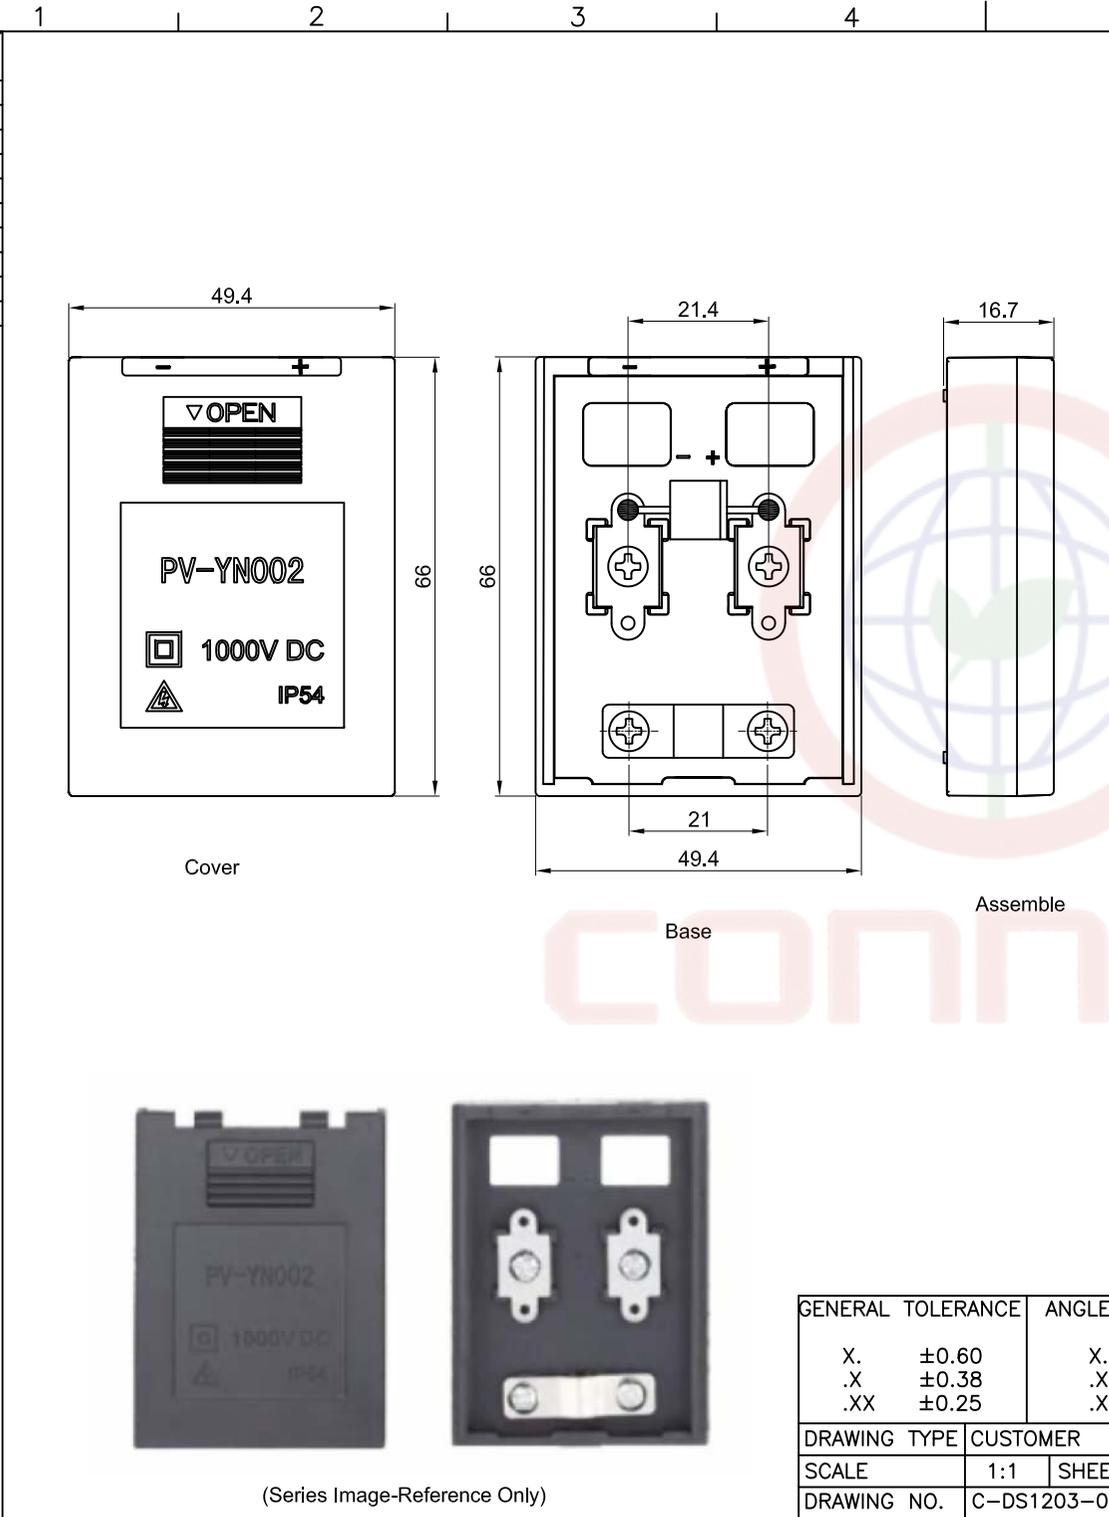


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	JLZ 05/31/24'		

- NOTES:
- Temp. Range: -40° C ~ +85° C.
  - Protection grade: IP54.
  - Cable OD: 1mm<sup>2</sup>.
  - Distance between the terminals: 21.4mm.

Materials:

- Insulator: PP0, Black.
- Contact: Copper Alloy, Tin Plated.
- Screw: Steel.

Product Number Code:  
DS1203-04 - X X



(Series Image-Reference Only)

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION	TITLE
X.	±0.60	X.	±5°		PV Junction Box W/ Diode Type
.X	±0.38	.X	±3°	mm	
.XX	±0.25	.XX	±2°	A4	SERIES DS1203-04 SERIES
DRAWING TYPE		CUSTOMER		晨翔电子有限公司 <b>CONNELY CONNELY ELECTRONIC CO. LTD</b>	
SCALE		1:1	SHEET 1 OF 1		
DRAWING NO.		C-DS1203-04-XX-A			