



Dept
Qty
DC 1
ED 1
IE 1
ISO 1
PD 1
R&D 1
SD 1
QA 1
QC 1
QE 1

The information provided herein is from CONNELY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights contained herein, including but not limited to, trademarks, patents, copyrights, trade secrets, and technical know-how, are owned exclusively by CONNELY or its affiliates. Unauthorized use or reproduction of this document without the prior written consent of CONNELY is strictly prohibited. CONNELY may enforce its intellectual property rights at its own discretion; failures or delays to exercise such rights does not constitute a waiver of such rights.



Cover

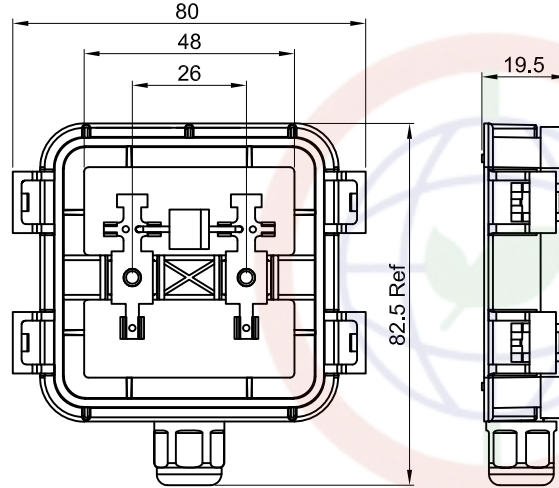

Base

Assemble



(Series Image-Reference Only)

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	JLZ 05/31/24'		

NOTES:

1. Temp. Range: $-40^{\circ}\text{C} \sim +85^{\circ}\text{C}$.
2. Protection grade: IP65.
3. Safety Class: Class 2.
4. Flame Resistance: 5VA
5. Rated Voltage: 1000V DC.
6. Cable OD: 4mm².
7. Distance between the terminals: 26mm.

Materials:

1. Insulator: PPO, Black.
2. Contact: Copper Alloy, Tin Plated.
3. Sealings: Silicone.

Product Number Code:
DS1203-05 - X X

Plating type
6: Tin

Main Body Color
B: Black

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE
X.	±0.60	X.	±5°	UNITS	mm	PV Junction Box W/ Diode Type
.X	±0.38	.X	±3°	SHEET SIZE	A4	
.XX	±0.25	.XX	±2°	SERIES DS1203-05 SERIES		
DRAWING TYPE		CUSTOMER		 晨翔电子有限公司 CONNFLY CONNELY ELECTRONIC CO. LTD		
SCALE		1:1	SHEET 1 OF 1			
DRAWING NO.		C-DS1203-05-XX-A				