

Dept	
Qty	
DC	1
ED	1
IE	1
ISO	1
PD	1
R&D	1
SD	1
QA	1
QC	1
QF	1

The information provided herein is from CONNELY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights contained herein, including but not limited to, trademarks, patents, copyrights, trade secrets, and technical know-how, are owned exclusively by CONNELY or its affiliates. Unauthorized use or reproduction of this information in any format or manner, CONNELY may enforce its intellectual property rights at its own discretion; failures or delays to exercise such rights does not constitute a waiver of such rights.

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	JLZ 05/31/24'		


- NOTES:
- Temp. Range: -40° C ~ +85° C.
 - Protection grade: IP65.
 - Safety Class: Class 2.
 - Flame Resistance: 5VA
 - Rated Voltage: 1000V DC.
 - Cable OD: 4mm².
 - Distance between the terminals: 21mm.

- Materials:
- Insulator: PPO, Black.
 - Contact: Copper Alloy, Tin Plated.
 - Sealings: Silicone.

Product Number Code:
DS1203-08 - X X

Plating type
6: Tin

Main Body Color
B: Black

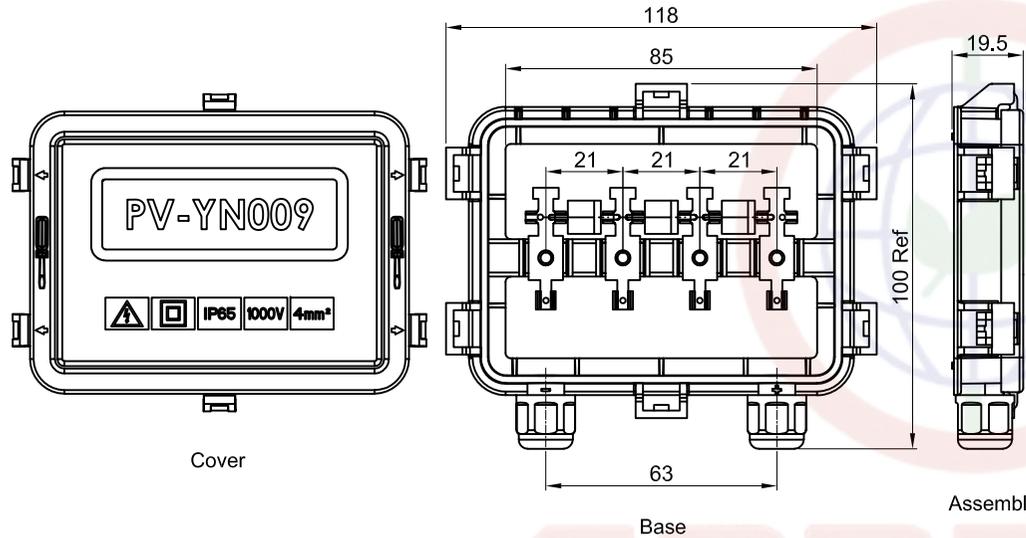

(Series Image-Reference Only)

GENERAL TOLERANCE		ANGLE TOLERANCE	
X.	±0.60	X.	±5°
.X	±0.38	.X	±3°
.XX	±0.25	.XX	±2°
DRAWING TYPE		CUSTOMER	
SCALE		1:1	SHEET 1 OF 1
DRAWING NO.		C-DS1203-08-XX-A	

PROJECTION		TITLE	PV Junction Box W/ Diode Type	
UNITS	mm	SERIES	DS1203-08 SERIES	
SHEET SIZE	A4			

晨翔电子有限公司
CONNELY CONNELY ELECTRONIC CO. LTD