

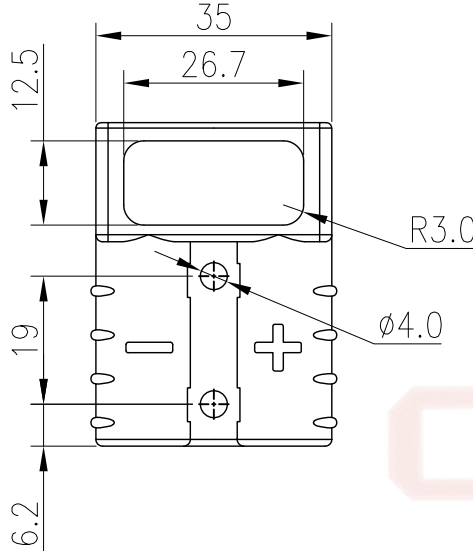



The information provided herein is from CONNPLY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights of CONNPLY Electronic Co., Ltd. are reserved. All intellectual properties provided herein are for reference purposes only and does not constitute authorization of its use in any format or manner. CONNPLY may enforce its intellectual property rights at its own discretion; failures or delays to exercise such rights does not constitute a waiver of such rights.

1 2 3 4 5 6 7 8

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	WPY 10/16/24'		



Notes:

1. Rated current: 50A
2. Voltage endurance: 600VDC
3. Recommended wire gauge: 12~6AWG

Materials:

1. Insulation Material: PC
2. Metal material: Copper plated with silver
3. Protection level: IP54
4. Flame retardant grade:UL94V-0

Product Number Code:


DS1224-02-X X X X

- Contact Plating  
Y:Full Silver
- Housing color:  
G:Gray
- Wire gauge:  
6:6AWG 8:8AWG 10:10-12AWG
- No. of Contacts  
2:2

Contact Product Number Code:

T-DS1224-02-C Y X 0

- Wire gauge:  
6:6AWG 8:8AWG 10:10-12AWG
- Contact Plating  
Y:Full Silver
- Mounting type:  
C:Crimp type

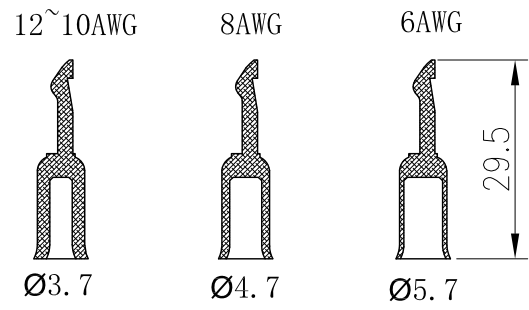

GENERAL TOLERANCE		ANGLE TOLERANCE	
X.	±0.60	X.	±5°
.X	±0.38	.X	±3°
.XX	±0.25	.XX	±2°

PROJECTION		TITLE	Anderson plug 50A
UNITS	mm	SHEET	1 OF 1
SHEET SIZE	A4	SERIES	DS1224-02 SERIES

**晨翔电子有限公司**  
**CONNPLY CONNPLY ELECTRONIC CO. LTD**

1 2 3 4 5 6 7 8