

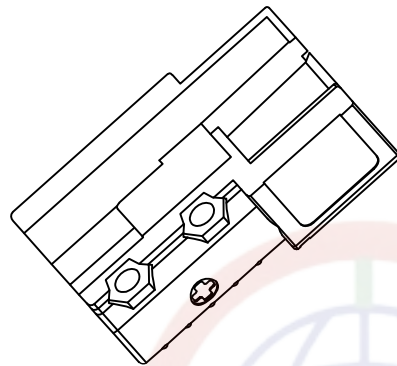
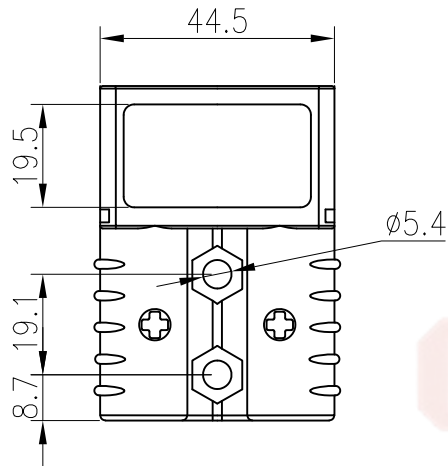


Dept
Qty
DC 1
ED 1
IE 1
ISO 1
PD 1
R&D 1
SD 1
QA 1
QC 1
QE 1


The information provided herein is from CONNELY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights are strictly prohibited without prior written consent from CONNELY. All intellectual properties provided herein are for reference purposes only and does not constitute authorization of its use in any format or manner. CONNELY may enforce its intellectual property rights at its own discretion; failures or delays to exercise such rights does not constitute a waiver of such rights.



6AWG

4AWG

2AWG



16²

φ5.7



25²

φ8.3



35²

φ9.5

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	WPY 10/16/24'		

Notes:

1. Rated current: 120A
2. Voltage endurance: 600VDC
3. Recommended wire gauge: 6~2AWG

Materials:

1. Insulation Material: PC
2. Metal material: Copper plated with silver
3. Protection level: IP54
4. Flame retardant grade: UL94V-0

Product Number Code:

DS1224-03-X X X X

Contact Plating

Y: Full Silver

Wire gauge:

6: 6AWG 4: 4AWG 2: 2AWG

Housing color:

G: Gray

No. of Contacts

2: 2

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	
X.	±0.60	X.	±5°	UNITS	mm	Anderson high current plug 120A	
.X	±0.38	.X	±3°	SHEET SIZE	A4	SERIES	DS1224-03 SERIES
.XX	±0.25	.XX	±2°	晨翔电子有限公司 CONNFLY CONNFLY ELECTRONIC CO. LTD			
DRAWING TYPE		CUSTOMER					
SCALE	1:1	SHEET	1 OF 1				
DRAWING NO.	C-DS1224-03-XXXX-A						