Dept / Qty	
DC	1
ED	1
IE	1
ISO	1
PD	1
R&D	1
SD	1
QA	1
QC	1
QE	1

The information provided herein is from CONNFLY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights contained herein, including but not limited to, trademarks, patents, copyrights, trade secrets, and technical know-how, are owned exclusively by CONNFLY or its affiliates. Unauthorized use or modification is strictly prohibited without prior written consent from CONNFLY. All intellectual properties provided herein are for reference purposes only and does not constitute authorization of its use in any format or manner. CONNFLY may enforce its intellectual property rights at its own discretion; failures or delays to exercise such rights does not constitute a waiver of such rights.

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	YCH 09/06/08'		LJC 09/06/08'
B	DRAWING UPDATE	JLZ 08/28/18'		

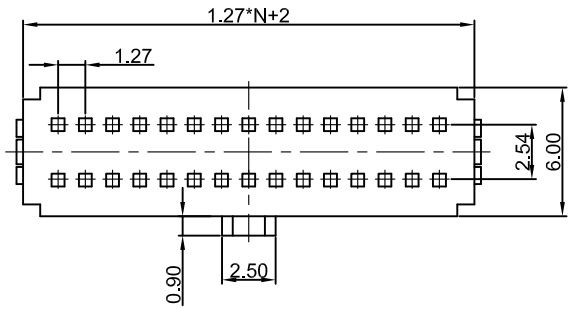

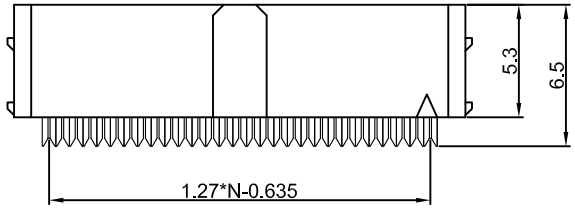

N=No. of contacts/2

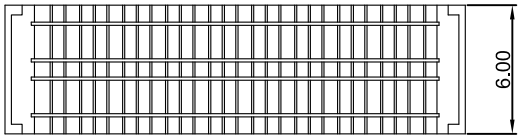

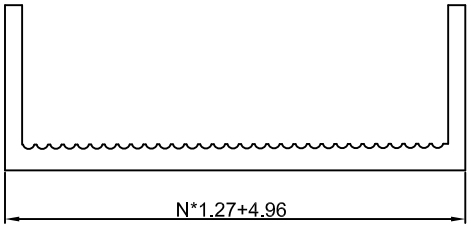

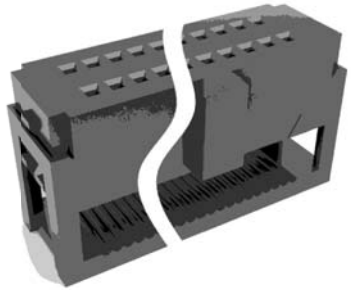

(Series Image-Reference Only)





NOTES:

1. Electrical characteristics:
   - 1.1 Contact resistance: 30mΩ Max.
   - 1.2 Dielectric withstanding voltage: 500V AC(rms) for 1 minute.
   - 1.3 Insulation resistance: 1000MΩ Min.
2. Environment characteristics:
   - 2.1 Temperature range: -40°C~+105°C.
3. Product number code:

DS1016-01- X X X X

- Housing color
  A:Gray
  B:Black
- Contact plating
  2:Nickel + Gold flash
  8:Full gold flash
- Polarization support
  A:W/
  B:W/O
- No. of contacts
  06 08 10 16 20 26 30 34
  40 50 60 64 68 80 100

GENERAL TOLERANCE		ANGLE TOLERANCE	
X.	±0.60	X.	±5°
.X	±0.38	.X	±3°
.XX	±0.25	.XX	±2°

DRAWING TYPE	CUSTOMER		
SCALE	1:1	SHEET	1 OF 1
DRAWING NO.	C-DS1016-01-XXXX-B		

PROJECTION		TITLE	IDC SOCKET PITCH 1.27*2.54mm
UNITS	mm		
SHEET SIZE	A4	SERIES	DS1016-01 SERIES

晨翔电子有限公司
CONNFLY CONNFLY ELECTRONIC CO. LTD